# BARREL SAUNA RAIN JACKET INSTALLATION INSTRUCTIONS



## IMPORTANT SAFETY INSTRUCTIONS

**DANGER: Indicates a hazardous situation that, if not avoided, will result in death or serious injury.**
**WARNING: Indicates a hazardous situation that, if not avoided, could result in death or serious injury.**
**CAUTION: Indicates a hazardous situation that, if not avoided, could result in minor or moderate injury.**
**NOTICE: Indicates information considered important, but not hazard-related.**

**FOLLOW SAFETY INFORMATION IN THIS DOCUMENT TO AVOID SERIOUS INJURY OR DEATH**

**REFER TO YOUR LOCAL BUILDING CODES FOR ANY SPECIFIC INSTALLATION REQUIREMENTS**

**KEEP THESE INSTRUCTIONS FOR FUTURE REFERENCE**

**REFERENCE SAUNA MANUAL FOR FURTHER SAFETY INFORMATION**

# RAIN JACKET INSTALLATION

Seepage and slight leaking in your barrel sauna is normal and harmless. However, if it is a nuisance to the sauna user the rain jacket is an effective and easy way to minimize seepage from the top half of the barrel!

Unwrap rain jacket. You should find the canvas with bungies pre-attached, and a small baggie of eyelet screws. (image 1) Center the rain jacket over your barrel. The jacket should be centered around the circumference of the barrel, as well as the length of the barrel. There should be ~1" of barrel exposed on each end of the jacket. (image 2) Once centered, make a mark approximately 4" below the end of each bungee. Install the provided eyelet screws here. You may pre-drill these holes if you wish, but this is not necessary due to the soft nature of the lumber. Do this for both sides of the rain jacket. (image 3) Attach the bungies on one side of the rain jacket to the eyelet screws. Repeat this process for the other side. (image 4)



Image 1



Image 2

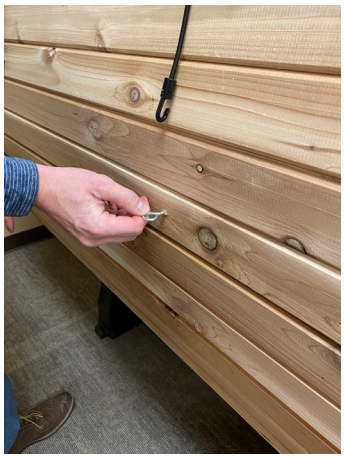


Image 3



Image 4