Incandescent

6" Housing
IC, Non-IC, & Air Tight

Recessed


Type _____

FSB_P87-AT X

FINNISH sauna builders

www.finnishsaunabuilders.com

Catalog No.	Lamping	Dimensions (Inches) A	B	C
FSB_P87-AT	See Trim Specifications	7-7/8	10-3/4	7-1/2
		Ceiling Opening 6-7/8		

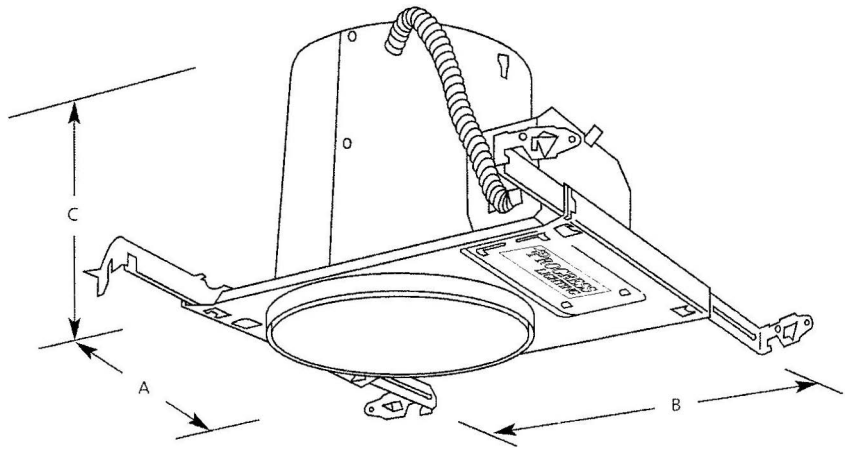

Specifications:

Wiring

- Universal junction box with snap-out sides
- Removable housing for field inspection of wiring
- Grounding pigtail
- Knockout free Romex clamps
- 1/2" & 3/4" Knock outs for rigid or BX fittings

Construction

- Housing adjusts from 1/2" to 2-1/2" for thick ceilings
- Full wrap-around plaster frame
- Removable K.O. for remodel use (P8607-01 plaster frame clips also required)
- Galvanized steel construction
- Porcelain socket with nickel-plated brass screw shell
- Notched housing for chalkline alignment
- Overspray protection
- Socket can be used as a temporary work light with 'A' lamp

Bar Hangers

- Integral nailers for wood joist construction
- Integral T-bar mounting clamps
- Span 24" T-bar spacing
- Lock to secure housing
- Captive
- 90-degree mounting for tight spaces

Labeling

- IC and Non-IC rated
- Complies with Washing State Energy Code (WSEC) requirement for air tight
- UL-CUL listed for damp location and through branch wiring
- Approved for use in New York City per calendar #40330.

Lamp/Trim

- Socket mounts to trim for optimum performance and consistent lamp position
- Trim-Lok® action forces trim to fit snugly against the ceiling

Patent# 5758959

Incandescent

6" Flat Albalite Shower Light with Reflector IC & Non-IC


Recessed

FINNISH sauna builders

www.finnishsaunabuilders.com

Type
-28
FSB_P8060 X

Catalog No.	Finish White Metallic	Dimensions (Inches) A	B
FSB_P8060	-28	7-3/4	5-3/16

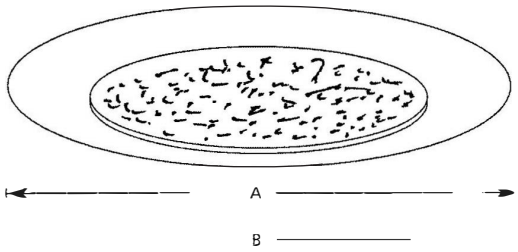

Lamp Wattage

Housing	IC	Non-IC
FSB_P87-AT	N/A	60A19, 75w PAR30 SN

Specifications:

Flange

- Bright white powdered painted metal flange - FSB_P8060-28
- No light leaks around trim flange
- Covers irregular ceiling openings

Trim

- Built-in bracket to accept Trim-Lok spring
- Trim-Lok action forces trim to fit snugly against the ceiling
- Socket mounts to yoke bracket for optimum performance and consistent lamp position

Lens

- Flat Albalite glass

Labels

- UL-CUL wet location listed

Patent# 5,758,976